


Staff Lockers

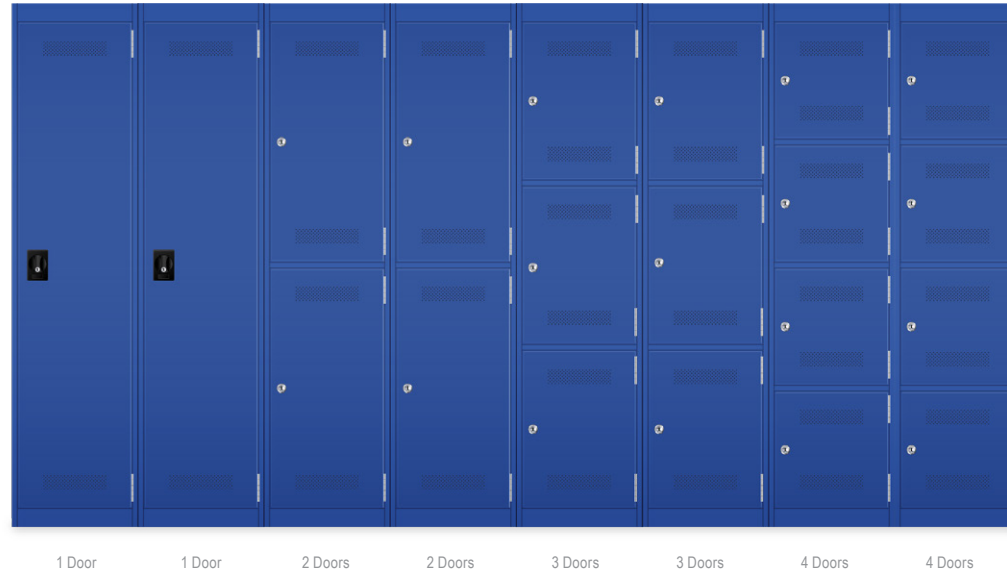

CSM's range of Staff Lockers ensure that the high-traffic, high-impact and high stakes of back of house operations can simplify to maximise operational performance.

CSM Staff Lockers are constructed from high-strength 1mm steel and engineered for durable performance and deliver maximum storage space as the solution for greater, simpler and value-driven organisation needs.

Guaranteed to perform, CSM Staff Lockers are designed and manufactured in Australia by CSM.

Features and Benefits

- Robust construction
- Flexible door options
- 200+ powder coat colours
- Door perforations and patterns
- Locking flexibility
- A range of integrated accessories
- Modular and reconfigurable design
- Easy disassembly
- Reusable and fully upscalable
- Effortless maintenance
- Recyclable
- Free from chemicals
- Australian designed and engineered
- Highest Green Star rating: FSC and GECA FFMv3.0-2017 Level A
- ISO certified: ISO 9001 Quality Assurance and ISO 14001 Environmental Management System
- Eco-light manufacturing
- Low maintenance

Dimensions (mm)
300 / 380 W x 1800 H x 450 D


Colour Range




Environmental Logos



Staff Lockers

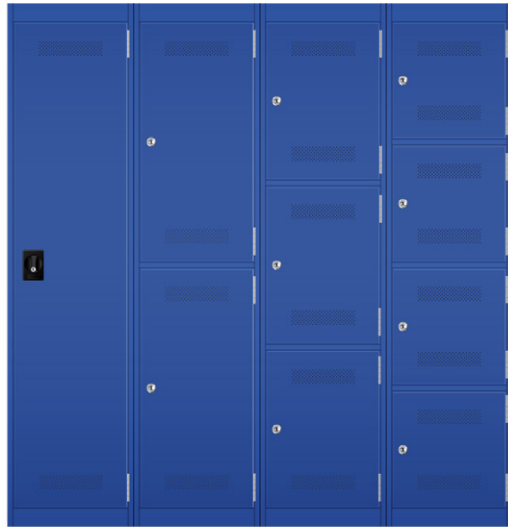

1 Door 2 Doors 3 Doors 4 Doors

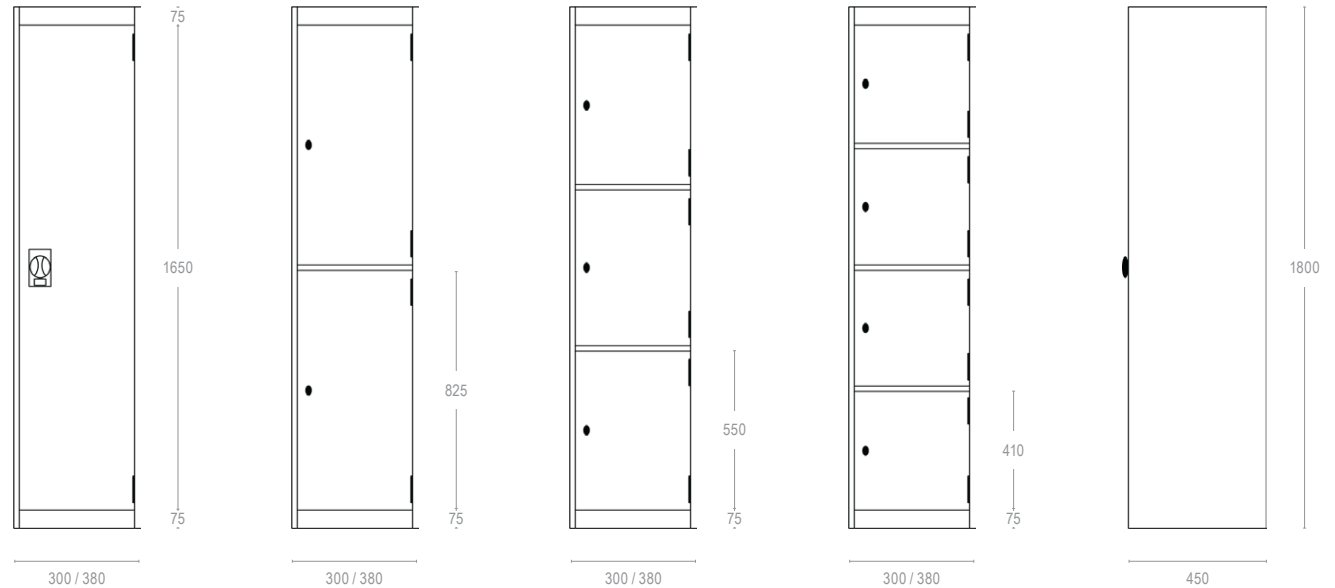

CSM Staff Locker systems are pre-constructed for ease of installation, providing a cost-efficient solution for your organisation's needs. Available in 1 door, 2 door, 3 door and 4 door modules, configure CSM Staff Lockers for your unique team requirements.

Their steel and rivet construction and powder-coat finish guarantee a long life. With vast internal space, with hanging rail and in-built plinth, there is plenty of room to store large bags, tools and equipment. As standard, they come with ventilation holes in the doors and two locking options – keylock or padlock. The ergonomics of the single door locker has 3 point locking and comes with a recessed handle and lock for greater security.

CSM Staff Lockers can be specified with extra shelves and hanging rails, alpha-numeric labelling and identification plates.

Dimensions (mm) – exclude side panels, infills, top panels and bulkheads for alcoves & niches

| Style | Product Code | Width (W) | Depth (D) | Door Height (DH) | Plinth Height (PH) | Overall Height (OH) |
|---------|--------------|-------------|-----------|------------------|--------------------|---------------------|
| 1 Door | BOHLock-1D | 300 / 380 W | 450 D | 1650 DH | 75 PH | 1800 OH |
| 2 Doors | BOHLock-2D | 300 / 380 W | 450 D | 825 DH | 75 PH | 1800 OH |
| 3 Doors | BOHLock-3D | 300 / 380 W | 450 D | 550 DH | 75 PH | 1800 OH |
| 4 Doors | BOHLock-4D | 300 / 380 W | 450 D | 410 DH | 75 PH | 1800 OH |

Colour Range



Environmental Logos

